



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁵ : A61L 31/00, D04H 13/00	A1	(11) International Publication Number: WO 93/11805 (43) International Publication Date: 24 June 1993 (24.06.93)
(21) International Application Number: PCT/EP92/02959 (22) International Filing Date: 18 December 1992 (18.12.92) (30) Priority data: PD91A000228 18 December 1991 (18.12.91) IT (71) Applicant (for all designated States except US): M.U.R.S.T. [IT/IT]; Italian Ministry for Universities and Scientific and Technological Research, Lungotevere Thaon de Revel, 39, I-Rome (IT). (72) Inventors; and (75) Inventors/Applicants (for US only) : DORIGATTI, Franco [IT/IT]; Via Segantini, 23, I-38015 Lavis (IT). CALLEGARO, Lanfranco [IT/IT]; Via Bravi, 35, I-35020 Ponte di Brenta (IT). ROMEO, Aurelio [IT/IT]; Viale Ippocrate, 93, I-00161 Rome (IT).		(74) Agent: VOSSIUS & PARTNER; Siebertstrasse 4, P.O. Box 86 07 67, D-8000 Munich 86 (DE). (81) Designated States: AU, BB, BG, BR, CA, CS, FI, HU, JP, KP, KR, LK, MG, MN, MW, NO, NZ, PL, RO, RU, SD, US, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, SN, TD, TG). Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>
(54) Title: COMPOSITE MEMBRANES FOR THE GUIDED REGENERATION OF TISSUES (57) Abstract Biomaterials are disclosed comprised of biodegradable, biocompatible, and bioabsorbable composite membranes for use in surgery for the guided regeneration of tissues. The composite membranes are comprised of threads embedded in a matrix, wherein both the matrix and the threads can be comprised of esters of hyaluronic acid, used singly or in combination, or esters of hyaluronic acid in combination with esters of alginic acid or other polymers.		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	FR	France	MR	Mauritania
AU	Australia	GA	Gabon	MW	Malawi
BB	Barbados	GB	United Kingdom	NL	Netherlands
BE	Belgium	GN	Guinea	NO	Norway
BF	Burkina Faso	GR	Greece	NZ	New Zealand
BG	Bulgaria	HU	Hungary	PL	Poland
BJ	Benin	IE	Ireland	PT	Portugal
BR	Brazil	IT	Italy	RO	Romania
CA	Canada	JP	Japan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SK	Slovak Republic
CI	Côte d'Ivoire	LJ	Liechtenstein	SN	Senegal
CM	Cameroon	LK	Sri Lanka	SU	Soviet Union
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	MC	Monaco	TG	Togo
DE	Germany	MG	Madagascar	UA	Ukraine
DK	Denmark	ML	Mali	US	United States of America
ES	Spain	MN	Mongolia	VN	Viet Nam
FI	Finland				

COMPOSITE MEMBRANES FOR THE GUIDED
REGENERATION OF TISSUES

BACKGROUND OF THE INVENTION

Field of the Invention

The present invention relates to a new biomaterial,
5 called a composite membrane, formed from hyaluronic acid
derivatives, processes for its production, and the use
of such composite membranes in surgery for the guided
regeneration of tissues in the treatment of superficial
and internal lesions.

10

Description of Related Art

Hyaluronic acid is a natural heteropolysaccharide
composed of alternating residues of D-glucuronic acid
and N-acetyl-D-glucosamine. It is a linear polymer with
15 a molecular weight of between 50,000 and 13,000,000
depending upon the source from which it is obtained, and
the preparation and determination methods employed. It
is present in nature in pericellular gels, in the
fundamental substance of connective tissues of
20 vertebrate organisms of which it is one of the main
components, in the synovial fluid of joints, in the
vitreous humor, in human umbilical cord tissues, and in
cocks' combs.

There are known, specific fractions of hyaluronic
25 acid with definite molecular weights that do not present

inflammatory activity and which can therefore be used to facilitate wound healing, or to substitute for the endobulbar fluids, or which can be used in therapy for joint pathologies by intra-articular injections as described in European Patent No. 0 138 572 granted to Applicants on July 25, 1990.

Also known are hyaluronic acid esters, wherein all or some of the carboxy groups of the acid are esterified, their use in the pharmaceutical and cosmetic fields and in the area of biodegradable plastic materials, as described in U.S. Patents 4,851,521, 4,965,353, and 5,147,861 granted to Applicants, and in European Patent Application 0 251 905 A2, published on January 7, 1988.

Hyaluronic acid is known to play a fundamental role in tissue repair processes, especially in the first stages of granulation, by stabilizing the coagulation matrix and controlling its degradation, favoring the recruitment of inflammatory cells such as polymorphonuclear leukocytes and monocytes, of mesenchymal cells such as fibroblasts and the endothelial cells, and orienting the subsequent migration of epithelial cells.

It is known that the application of solutions of hyaluronic acid can accelerate healing in patients affected by bedsores, wounds and burns.

The role of hyaluronic acid in the various phases that constitute tissue repair processes have been described, by the construction of a theoretical model, by Weigel P.H. et al.: "A model for the role of hyaluronic acid and fibrin in the early events during the inflammatory response and wound healing," J. Theor. Biol., 119: 219, 1986.

Studies aimed at obtaining manufactured products to apply to the skin, composed of hyaluronic acid esters as

such or in mixtures with other polymers, have led to the creation of various types of products. Among these are tissues, such as gauzes of varying thickness (number of threads per centimeter), with varying dimensions and
5 with threads of varying denier (weight per 9000 meters of thread).

Films of widely varying thickness have been proposed as described in U.S. Patents 4,851,521 and 4,965,353.

10 One of the limitations to the use of manufactured products composed of hyaluronic acid esters or mixtures of the same with other polymers is their low mechanical resistance, which may cause various problems with their use. In the case of biomaterials, such as membranes or
15 other types of film-forming products, that have to be sewn in place, surgical needles or suture threads can give rise to cracks, cuts or lacerations that jeopardize the structural soundness of the membrane, and consequently the stability of the membrane in its place
20 of application, thus laying the wound open to contamination and undesirable consequences.

Modern surgery now tends to employ, wherever possible, biomaterials with high biocompatibility, such as those obtained from hyaluronic acid esters,
25 characterized also by high biodegradability and bioabsorbability.

SUMMARY OF THE INVENTION

Objects of the present invention include methods of
30 preparing, characterizing, and using composite, biocompatible and bioabsorbable membranes, comprising hyaluronic acid esters used singly or in mixtures. Compared to other membranes obtained from the same hyaluronic acid esters, these composite membranes
35 possess superior properties with respect to mechanical

resistance to tension and physical and mechanical tearing, even where suture stitches are used or other means of securing in general use in surgical practice for the application of biomaterials inside or on the surface of the human body are employed. Apart from these new mechanical properties, such composite membranes are also highly biocompatible and biodegradable.

The composite membranes of the present invention may comprise hyaluronic acid esters used singly or in mixtures, alginic acid esters used singly or in combination, and mixed membranes comprising hyaluronic acid esters and alginic acid esters in combination, or such esters used in combination with other polymers.

Further scope of the applicability of the present invention will become apparent from the detailed description and drawings provided below. However, it should be understood that the detailed description and specific examples, while indicating preferred embodiments of the invention, are given by way of illustration only since various changes and modifications within the spirit and scope of the invention will become apparent to those skilled in the art from this detailed description.

BRIEF DESCRIPTION OF THE DRAWINGS

The above and other objects, features, and advantages of the present invention will be better understood from the following detailed descriptions taken in conjunction with the accompanying drawings, all of which are given by way of illustration only, and are not limitative of the present invention, in which:

Figure 1 is a schematic diagram illustrating the steps involved in the production of the composite membranes of the present invention.

Figure 2 shows the HYAFF 7 mesh which results from

the process described in Example 27.

Figure 3 shows the HYAFF 7 mesh shown in Figure 2 after application of the HYAFF 11 polymeric matrix, as described in Example 27.

5

DETAILED DESCRIPTION OF THE INVENTION

The following detailed description of the invention is provided to aid those skilled in the art in practicing the present invention. Even so, the following detailed description should not be construed to unduly limit the present invention, as modifications and variations in the embodiments herein discussed may be made by those of ordinary skill in the art without departing from the spirit or scope of the present inventive discovery.

The contents of each of the references cited in the present application are herein incorporated by reference in their entirety.

The aforesaid objects are achieved by providing composite membranes according to the present invention, having a basis weight between about 8 gr/cm² and about 50 gr/cm², with a thickness when dry between about 0.08 mm and about 0.5 mm, a minimum tensile strength at break when dry of about 100 Kg/cm² to about 1000 Kg/cm², an elongation when dry between about 3% and about 12%, a minimum tensile strength at break when wet between about 30 Kg/cm² and about 450 Kg/cm², and an elongation when wet between about 20% and about 60%, a tear strength when dry of about 40 Kg/cm² to about 200 Kg/cm², and when wet of about 20 Kg/cm² to about 160 Kg/cm².

The composite membrane of the present invention is a composite structure comprising a polymeric matrix in which a mesh reinforcement comprising a material the same as or different from the matrix has been embedded.

The reinforcing structure, which guards against the spread of cracks or tears caused by suture threads or surgical needles, comprises a multiple and possibly twisted thread, produced by extrusion under dry or wet conditions, knitted into a fabric with a gauge between about 10 and about 16.

The multiple thread is composed of between about 30 and about 120 filaments (strands) between about 18 microns and about 35 microns in diameter, and between about 150 and about 400 denier.

The polymeric matrix and the inner reinforcing mesh can comprise hyaluronic acid esters as described in U.S. Patents 4,851,521 and 4,965,353, and in PCT publication WO 92-13579, used singly or in mixtures with each other in varying percentages.

Moreover, the polymeric matrix, in which is embedded the mesh reinforcement, can comprise mixtures of one or more hyaluronic acid esters in addition to biologically and pharmacologically active principles of gelled polysaccharides such as chitin, alginates, chitosan, gellan, and their synthetic or semisynthetic derivatives.

The present composite membranes are unique in that they are entirely biocompatible and biodegradable since they are composed, internally and externally, of materials possessing such characteristics. The composite structure, i.e., the mesh/polymeric matrix, comprises a single mass wherein the two component parts are inseparable, even under wet conditions. This is a result of the coating technique used on the reinforcing mesh, wherein the polymeric coating solution contains a solubilization solvent, which is also a solvent used for producing the material comprising the reinforcing mesh. The solubilization solvent acts on the mesh, creating a chemical link between the polymeric matrix and the

reinforcing mesh. The final product is a single article comprising the two combined structures.

The present composite membranes are also unique as it is possible to modulate the resistance and stiffness characteristics of the material under wet conditions. This can be achieved by inserting biocompatible and bioabsorbable reinforcement meshes constituting a single body within the polymeric matrix. Thus, different mechanical performance can be achieved by employing different materials with varying intrinsic properties constituting the threads. For example, with respect to HYAFF 11 and ALAFF 11, the properties of these threads can be summarized as follows:

	Tensile Strength (MPa)	Elongation (%)	Young Module (MPa)
HYAFF 11	39	96	560
ALAFF 11	183	15	5428

Thus, the composite membranes of the present invention possess the advantage that the stiffness of the inner mesh can be modulated, according to need, while guaranteeing the integrity of the final product. Conventional composite materials for biomedical use comprising reinforcement meshes in polymeric matrices possess the drawback that the two components possess different mechanical characteristics, and are therefore prone to becoming separated under, for example, wet conditions.

The composite membranes of the present invention possess the advantage that, while being made of materials with different chemical/physical characteristics, they do not suffer from the drawback of becoming separated in use.

The composite membranes with the aforesaid

characteristics can be produced starting from a mesh reinforcement constructed as follows. With reference to Fig. 1, a polymer solution at a concentration of between about 80 mg/ml and about 180 mg/ml is prepared in a vessel (1), is fed by a gear metering pump (2) into a spinneret for wet extrusion with between about 30 and about 120 holes, each measuring between about 55 microns and about 140 microns in diameter. The multiple thread extruded therefrom passes into a coagulating bath (3) and is then moved across transporting rollers into three successive baths where it is rinsed (4,5,6). The ratio between the speed of the third roller (III) and that of the first roller (I) is called the drafting ratio, and varies between about 1 and about 1.3, while the speed of the rollers varies between about 2 and about 30 rpm (revolutions per minute). Once it has been passed through the rinsing baths, the multiple thread is dried with warm air (7) at a temperature varying between about 40°C and about 55°C, and is then wound onto a winding frame (8). The denier of the thread varies between about 150 and about 400 denier. The multiple thread is then twisted between about 90 and about 200 times per meter and woven on a loom into a smooth knitted fabric with a gauge of between about 10 and about 16 (9,10). When it comes off the loom, the fabric is fed through a calendar (11) which thins it down. The polymeric matrix is fed between two airbrushes (14) which spray it with a polymer solution at a concentration of between about 30 mg/ml and about 120 mg/ml. The solvent which can be employed to form this polymer solution can be an aprotic solvent, and can include an amide of a carboxylic acid, especially a dialkylamide of an aliphatic acid with between 1 and 5 carbon atoms and deriving from alkyl groups with between 1 and 6 carbon atoms, and from an organic sulfoxide, that is, a dialkylsulfoxide with

alkyl groups with a maximum of 6 carbon atoms, such as especially, dimethylsulfoxide or diethylsulfoxide, and by a fluorinated solvent with a lower boiling point, such as hexafluoro-isopropanol. N-methyl pyrrolidone is also useful. The sprayed mesh passes into a coagulation bath (15), into a washing chamber (16), and into a heated roller drying chamber with a temperature varying between about 40°C and about 55°C (17).

The coagulation baths 3 and 15 are stainless steel, and are in the form of an upturned triangle so that the extracted solubilization solvent can be deposited in the deepest part thereof, while the material being formed can be kept in contact with fresh coagulation solvent.

The coagulation process is essentially an extraction process by which, from a solution of polymer and solvent, the extraction of the solubilization solvent and the solidification of the polymer can be effected by the addition of a second solvent, for example ethanol, in which the solubilization solvent, for example dimethylsulfoxide, is soluble, and the polymer is insoluble.

The present invention therefore relates to a new class of product to be used in the medical/pharmaceutical field for the treatment of internal or superficial lesions. The product is known as a "composite membrane," and is totally or partially biocompatible and bioabsorbable. It is composed of hyaluronic acid esters, singly or mixed together with other natural, synthetic or semisynthetic polymers. Such materials exhibit high mechanical resistance, especially to tearing, which tends to occur in surgery when membranes are fixed to the tissues surrounding the operated area.

The greater mechanical resistance of the present composite membranes compared to membranes obtained by

simple extrusion can be determined by mechanical characterization. To demonstrate this, a comparison was conducted between a continuous membrane of hyaluronic acid ethyl ester and a composite membrane with a
 5 hyaluronic acid ethyl ester mesh and a matrix of hyaluronic acid benzyl ester. The comparison yielded the results shown in Table 1.

TABLE 1

	TYPE OF MEMBRANE			
	CONTINUOUS		COMPOSITE	
	DRY	WET	DRY	WET
10 THICKNESS (um)	18.8	60	195	400
MIN. TENSILE STRENGTH AT BREAK (Kg/cm ²)	1000	40	650	120
15 ELONGATION (%)	6	42	7	50
TEAR STRENGTH (Kg/cm ²)	15	8	90	50

Tear strength was measured by passing an 8/0 suture
 20 thread through the membrane with a surgical needle.

These data demonstrate that under wet conditions (working conditions) the mechanical characteristics of the composite membrane of the present invention are markedly better than those of the traditional,
 25 continuous membrane.

The Esters of Hyaluronic Acid

Esters of hyaluronic acid useful in the present invention are esters of hyaluronic acid with aliphatic,
 30 araliphatic, cycloaliphatic or heterocyclic alcohols, in which are esterified all (so-called "total esters") or only a part (so-called "partial esters") of the carboxylic groups of the hyaluronic acid, and salts of

the partial esters with metals or with organic bases, biocompatible or acceptable from a pharmacological point of view.

5 The useful esters include esters which derive from alcohols which themselves possess a notable pharmacological action. The saturated alcohols of the aliphatic series or simple alcohols of the cycloaliphatic series are useful in the present invention.

10 In the above mentioned esters in which some of the carboxylic acid groups remain free (i.e., partial esters), these may be salified with metals or organic bass, such as with alkaline or alkaline earth metals or with ammonia or nitrogenous organic bases.

15 Most of the esters of hyaluronic acid ("HY"), unlike HY itself, present a certain degree of solubility in organic solvents. This solubility depends on the percentage of esterified carboxylic groups and on the type of alkyl group linked with the carboxyl.
20 Therefore, an HY compound with all its carboxylic groups esterified presents, at room temperature, good solubility for example in dimethylsulfoxide (the benzyl ester of HY dissolves in DMSO in a measure of 200 mg/ml). Most of the total esters of HY present also,
25 unlike HY and especially its salts, poor solubility in water and are essentially insoluble in water. The solubility characteristics, together with particular and notable viscoelastic properties, make the HY esters particularly preferred for use in composite membranes.

30 Alcohols of the aliphatic series to be used as esterifying components of the carboxylic groups of hyaluronic acid for use in composite membranes according to the present invention are for example those with a maximum of 34 carbon atoms, which may be saturated or
35 unsaturated and which may possibly also be substituted

by other free functional or functionally modified groups, such as amine, hydroxyl, aldehyde, ketone, mercaptan, or carboxyl groups or by groups derived from these, such as hydrocarbyl or di-hydrocarbylamine groups (from now on the term "hydrocarbyl" will be used to refer not only to monovalent radicals of hydrocarbons such as the C_nH_{2n+1} type, but also bivalent or trivalent radicals, such as "alkylenes" C_nH_{2n} or "alkylidenes" C_nH_{2n}), ether or ester groups, acetal or ketal groups, thioether or thioester groups, and esterified carboxyl or carbamide groups and carbamide substituted by one or more hydrocarbyl groups, by nitrile groups or by halogens.

Of the above mentioned groups containing hydrocarbyl radicals, these are preferably lower aliphatic radicals, such as alkyls, with a maximum of 6 carbon atoms. Such alcohols may also be interrupted in the carbon atom chain by heteroatoms, such as oxygen, nitrogen and sulfur atoms. Preferred are alcohols substituted with one or two of the said functional groups.

Alcohols of the above mentioned group which are preferably used are those with a maximum of 12, and especially 6 carbon atoms, and in which the hydrocarbyl atoms in the above mentioned amine, ether, ester, thioether, thioester, acetal, ketal groups represent alkyl groups with a maximum of 4 carbon atoms, and also in the esterified carboxyl or substituted carbamide groups the hydrocarbyl groups are alkyls with the same number of carbon atoms, and in which in the amine or carbamide groups may be alkylenamine or alkylencarbamide groups with a maximum of 8 carbon atoms. Of these alcohols, specifically preferred are saturated and non-substituted alcohols, such as the methyl, ethyl, propyl,

and isopropyl alcohols, normal butyl alcohol, isobutyl alcohol, tertiary butyl alcohol, the amyl, pentyl, hexyl, octyl, nonyl and dodecyl alcohols and, above all, those with a linear chain, such as normal octyl and dodecyl alcohols. Of the substituted alcohols of this group, the bivalent alcohols are useful, such as ethyleneglycol, propyleneglycol and butyleneglycol, the trivalent alcohols such as glycerine, the aldehyde alcohols such as tartronic alcohol, the carboxylic alcohols such as lactic acids, for example glycolic acid, malic acid, the tartaric acids, citric acid, the aminoalcohols, such as normal aminoethanol, aminopropanol, normal aminobutanol and their dimethylated and diethylated derivatives in the amine function, choline, pyrrolidinyethanol, piperidinyethanol, piperazineylethanol and the corresponding derivatives of normal propyl or normal butyl alcohol, monothioethyleneglycol or its alkyl derivatives, such as the ethyl derivative in the mercaptan function.

Of the higher saturated aliphatic alcohols, preferred are cetyl alcohol and myricyl alcohol, but for the aim of the present invention the higher unsaturated alcohols with one or two double bonds, are especially important, such as especially those contained in many essential oils and with affinity to terpene, such as citronellol, geraniol, nerol, nerolidol, linalool, farnesol, phytol. of the unsaturated lower alcohols it is necessary to consider allyl alcohol and propargyl alcohol. Of the araliphatic alcohols, preferred are those with only one benzene residue and in which the aliphatic chain has a maximum of 4 carbon atoms, which the benzene residue can be substituted by between 1 and 3 methyl or hydroxyl groups or by halogen atoms, especially by chlorine, bromine and iodine, and in which

the aliphatic chain may be substituted by one or more functions chosen from the group containing free amine groups or mono- or dimethylated or by pyrrolidine or piperidine groups. Of these alcohols, most preferred
5 are benzyl alcohol and phenethyl alcohol.

The alcohols of the cycloaliphatic or aliphatic-cycloaliphatic series may derive from mono- or polycyclic hydrocarbons, may preferably have a maximum of 34 carbon atoms, may be unsubstituted and may contain
10 one or more substituents, such as those mentioned above for the aliphatic alcohols. Of the alcohols derived from cyclic monoannular hydrocarbons, preferred are those with a maximum of 12 carbon atoms, the rings with preferably between 5 and 7 carbon atoms, which may be
15 substituted for example by between one and three lower alkyl groups, such as methyl, ethyl, propyl or isopropyl groups. As specific alcohols of this group the following are most preferred: cyclohexanol, cyclohexanediol, 1,2,3-cyclohexanetriol and 1,3,5-
20 cyclohexanetriol (phloroglucitol), inositol, and the alcohols which derive from p-methane such as carvomenthol, menthol, and α -terpineol, 1-terpineol, 4-terpineol and piperitol, or the mixture of these alcohols known as "terpineol", 1,4- and 1,8-terpin. Of
25 the alcohols which derive from hydrocarbons with condensed rings, such as those of the thujane, pinane or camphane, the following are preferred: thujanol, sabinol, pinol hydrate, D and L-borneol and D and L-isoborneol.

30 Aliphatic-cycloaliphatic polycyclic alcohols to be used for the esters of the present invention are sterols, cholic acids and steroids, such as sexual hormones and their synthetic analogues, especially corticosteroids and their derivatives. It is therefore
35 possible to use: cholesterol, dihydrocholesterol,

epidihydrocholesterol, coprostanol, epicoprostanol, sitosterol, stigmasterol, ergosterol, cholic acid, deoxycholic acid, lithocholic acid, estriol, estradiol, equilenin, equilin and their alkylate derivatives, as well as their ethynyl or propynyl derivatives in position 17, such as 17 α -ethynyl-estradiol or 7 α -methyl-17 α -ethynyl-estradiol, pregnenolone, pregnanediol, testosterone and its derivatives, such as 17 α -methyltestosterone, 1,2-dehydrotestosterone and 17 α -methyl-1,2-dehydrotestosterone, the alkynylate derivatives in position 17 of testosterone and 1,2-dehydrotestosterone, such as 17 α -ethynyltestosterone, 17 α -propynyltestosterone, norgestrel, hydroxyprogesterone, corticosterone, deoxycorticosterone, 19-nortestosterone, 19-nor-17 α -methyltestosterone and 19-nor-17 α -ethynyltestosterone, antihormones such as cyproterone, cortisone, hydrocortisone, prednisone, prednisolone, fluorocortisone, dexamethasone, betamethasone, paramethasone, flumethasone, fluocinolone, fluprednylidene, clobetasol, beclomethasone, aldosterone, deoxycorticosterone, alfaxolone, alfadolone, and bolasterone. As esterifying components for the esters of the present invention the following are useful: genins (aglycons) of the cardioactive glucosides, such as digitoxigenin, gitoxigenin, digoxigenin, strophanthidin, tigogenin and saponins.

Other alcohols to be used according to the invention are the vitamin ones, such as axerophthol, vitamins D₂ and D₃, aneurine, lactoflavine, ascorbic acid, riboflavine, thiamine, and pantothenic acid.

Of the heterocyclic acids, the following can be considered as derivatives of the above mentioned cycloaliphatic or aliphatic-cycloaliphatic alcohols if their linear or cyclic chains are interrupted by one or

more, for example by between one and three heteroatoms, for instance chosen from the group formed by -O-, -S-, -N, and -NH-, and in these, there may be one or more unsaturated bonds, for example double bonds, in particular between one and three, thus including also heterocyclic compounds with aromatic structures. For example the following should be mentioned: furfuryl alcohol, alkaloids and derivatives such as atropine, scopolamine, cinchonine, la cinchonidine, quinine, morphine, codeine, nalorphine, N-butylscopolammonium bromide, ajmaline; phenylethylamines such as ephedrine, isoproterenol, epinephrine; phenothiazine drugs such as perphenazine, pipothiazine, carphenazine, homofenazine, acetophenazine, fluophenazine, and N-hydroxyethylpromethazine chloride; thioxanthene drugs such as flupenthixol and clopenthixol; anticonvulsants such as meprophenidol; antipsychotics such as opipramol; antiemetics such as oxypendyl; analgesics such as carbetidine and phenoperidine and methadol; hypnotics such as etodroxizine; anorexics such as benzydrol and diphemethoxidine; minor tranquilizers such as hydroxyzine; muscle relaxants such as cinnamedrine, diphylline, mephenesin, methocarbamol, chlorphenesin, 2,2-diethyl-1,3-propanediol, guaifenesin, hydrocilamide; coronary vasodilators such as dipyridamole and oxyfedrine; adrenergic blockers such as propanolol, timolol, pindolol, bupranolol, atenolol, metoprolol, practolol; antineoplastics such as 6-azauridine, cytarabine, floxuridine; antibiotics such as chloramphenicol, thiamphenicol, erythromycin, oleandomycin, lincomycin; antivirals such as idoxuridine; peripheral vasodilators such as isonicotinyl alcohol; carbonic anhydrase inhibitors such as sulocarbilate; antiasthmatic and antiinflammatories such as tiaramide; sulfamidics such as 2-p-

sulfanilonoethanol.

In some cases hyaluronic acid esters may be of interest where the ester groups derive from two or more therapeutically active hydroxylic substances, and naturally all possible variants may be obtained. Especially interesting are the substances in which two types of different ester groups deriving from drugs of a hydroxylic character are present and in which the remaining carboxyl groups are free, salified with metals or with a base, possibly also the bases being themselves therapeutically active, for example with the same or similar activity as that of the esterifying component. In particular, it is possible to have hyaluronic esters deriving on the one hand from an antiinflammatory steroid, such as one of those mentioned previously, and on the other hand from a vitamin, from an alkaloid or from an antibiotic, such as one of those listed.

Method of Preparing HY Esters of the Invention

20 Method A:

The esters of hyaluronic acid may be prepared by methods known per se for the esterification of carboxylic acids, for example by treatment of free hyaluronic acid with the desired alcohols in the presence of catalyzing substances, such as strong inorganic acids or ionic exchangers of the acid type, or with an etherifying agent capable of introducing the desired alcoholic residue in the presence of inorganic or organic bases. As esterifying agents it is possible to use those known in literature, such as especially the esters of various inorganic acids or of organic sulphonic acids, such as hydracids, that is hydrocarbyl halogenides, such as methyl or ethyl iodide, or neutral sulphates or hydrocarbyl acids, alfites, carbonates, silicates, phosphites or hydrocarbyl sulfonates, such as

methy1 benzene or p-toluene-sulfonate or methyl or ethyl chlorosulfonate. The reaction may take place in a suitable solvent, for example an alcohol, preferably that corresponding to the alkyl group to be introduced in the carboxyl group. But the reaction may also take place in non-polar solvents, such as ketones, ethers, such as dioxane or aprotic solvents, such as dimethylsulphoxide. As a base it is possible to use for example a hydrate of an alkaline or alkaline earth metal or magnesium or silver oxide or a basic salt or one of these metals, such as a carbonate, and, of the organic bases, a tertiary azotized base, such as pyridine or collidine. In the place of the base it is also possible to use an ionic exchanger of the basic type.

Another esterification method employs the metal salts or salts with organic azotized bases, for example ammonium or ammonium substitute salts. Preferably, the salts of the alkaline or alkaline earth metals are used, but also any other metallic salt may be used. The esterifying agents are also in this case those mentioned above and the same applies to the solvents. It is preferable to use aprotic solvents, for example dimethylsulphoxide and dimethylformamide.

In the esters obtained according to this procedure or according to the other procedure described hereafter, free carboxylic groups of the partial esters may be salified, if desired, in a per se known manner.

Method B:

The hyaluronic esters may also be prepared by a method which consists of treating a quaternary ammonium salt of hyaluronic acid with an etherifying agent, preferably in an aprotic organic solvent.

As organic solvents it is preferable to use aprotic solvents, such as dialkylsulphoxides,

dialkylcarboxamides, such as in particular lower alkyl dialkylsulphoxides, especially dimethyl-sulphoxide, and lower alkyl dialkylamides of lower aliphatic acids, such as dimethyl or diethyl-formamide or dimethyl or diethylacetamide.

Other solvents however are to be considered which are not always aprotic, such as alcohols, ethers, ketones, esters, especially aliphatic or heterocyclic alcohols and ketones with a lower boiling point, such as hexafluoroisopropanol, trifluoroethanol, and N-methylpyrrolidone.

The reaction is effected preferably at a temperature range of between about 0°C and 100°C, especially between about 25°C and 75°C, for example at about 30°C.

The esterification is carried out preferably by adding by degrees the esterifying agent to the above mentioned ammonium salt to one of the above mentioned solvents, for example to dimethyl-sulphoxide.

As an alkylating agent it is possible to use those mentioned above, especially the hydrocarbyl halogens, for example alkyl halogens. As starting quaternary ammonium salts it is preferable to use the lower ammonium tetraalkylates, with alkyl groups preferably between 1 and 6 carbon atoms. Mostly, hyaluronate of tetrabutylammonium is used. It is possible to prepare these quaternary ammonium salts by reacting a metallic salt of hyaluronic acid, preferably one of those mentioned above, especially sodium or potassium salt, in aqueous solution with a salified sulphonic resin with a quaternary ammonium base.

One variation of the previously described procedure consists in reacting a potassium or sodium salt of hyaluronic acid, suspended in a suitable solution such as dimethylsulphoxide, with a suitable alkylating agent

in the presence of catalytic quantities of a quaternary ammonium salt, such as iodide of tetrabutylammonium.

For the preparation of the hyaluronic acid esters, it is possible to use hyaluronic acids of any origin, such as for example the acids extracted from the above mentioned natural starting materials, for example from cocks' combs. The preparation of such acids is described in literature: preferably, purified hyaluronic acids are used. Especially used are hyaluronic acids comprising molecular fractions of the integral acids obtained directly by extraction of the organic materials with molecular weights varying within a wide range, for example from about 90%-80% (MW = 11.7 - 10.4 million) to 0.2% (MW = 30,000) of the molecular weight of the integral acid having a molecular weight of 13 million, preferably between 5% and 0.2%. Such fractions may be obtained with various procedures described in literature, such as by hydrolyzing, oxydizing, enzymatic or physical procedures, such as mechanical or radiational procedures. Primordial extracts are therefore often formed during these same by publication procedures (for example see the article by Balazs et al. quoted above in "Cosmetics & Toiletries"). The separation and purification of the molecular fractions obtained are brought about by known techniques, for example by molecular filtration.

Additionally useful are purified fractions obtainable from hyaluronic acid, such as for example the ones described in European Patent Publ'n. No. 0138572.

The salification of HY with the above metals, for the preparation of starting salts for the particular esterification procedure described above, is performed in a per se known manner, for example by reacting HY with the calculated base quantity, for example with alkaline hydrates or with basic salts of such metals,

such as carbonates or bicarbonates.

In the partial esters it is possible to salify all the remaining carboxylic groups or only part of them, dosing the base quantities so as to obtain the desired stoichiometric degree of salification. With the correct degree of salification it is possible to obtain esters with a wide range of different dissociation constants and which therefore give the desired pH, in solution or "in situ" at the time of therapeutic application.

Preparation Examples:

The following exemplify the preparation of hyaluronic acid esters useful in the composite membranes of the present invention.

Example 1 - Preparation of the (partial) propyl ester of hyaluronic acid (HY)

- 50% of the esterified carboxylic groups
- 50% of the salified carboxylic groups (Na)

12.4 g of HY tetrabutylammonium salt with a molecular weight 170,000 corresponding to 20 m.Eq. of a monomeric unit are solubilized in 620 ml of dimethylsulfoxide at 25°C, 1.8 g (10.6 m.Eq.) of propyl iodide are added and the resulting solution is kept at a temperature of 30° for 12 hours.

A solution containing 62 ml of water and 9 g of sodium chloride is added and the resulting mixture is slowly poured into 3,500 ml of acetone under constant agitation. A precipitate is formed which is filtered and washed three times with 500 ml of acetone/water 5:1 and three times with acetone and finally vacuum dried for eight hours at 30°C.

The product is then dissolved in 550 ml of water containing 1% of sodium chloride and the solution is slowly poured into 3,000 ml of acetone under constant

agitation. A precipitate is formed which is filtered and washed twice with 500 ml of acetone/water (5:1) and three times with 500 ml of acetone and finally vacuum dried for 24 hours at 30°C. 7.9 g of the partial propyl ester compound in the title are obtained. Quantitative determination of the ester groups is carried out using the method of R.H. Cundiff and P.C. Markunas [Anal. Chem. 33, 1028-1030, (1961)].

10 Example 2 - Preparation of the (partial) isopropyl ester of hyaluronic acid (HY) - 50% of esterified carboxylic groups - 50% of salified carboxylic groups (Na)

12.4 g of HY tetrabutylammonium salt with a molecular weight of 160,000 corresponding to 20 m.Eq. of a monomeric unit are solubilized in 620 ml of dimethylsulfoxide at 25°C, 1.8 g (10.6 m.Eq.) of isopropyl iodide are added and the resulting solution is kept for 12 hours at 30°C.

A solution containing 62 ml of water and 9 g of sodium chloride is added and the resulting mixture is slowly poured into 3,500 ml of acetone under constant agitation. A precipitate is formed which is filtered and washed three times with 500 ml of acetone/water 5:1 and three times with acetone and finally vacuum dried for eight hours at 30°C.

The product is then dissolved in 550 ml of water containing 1% of sodium chloride and the solution is slowly poured into 3,000 ml of acetone under constant agitation. A precipitate is formed which is filtered and washed twice with 500 ml of acetone/water 5:1 and three times with 500 ml of acetone and finally vacuum dried for 24 hours at 30°C. 7.8 g of the partial isopropyl ester compound in the title are obtained. Quantitative determination of the ester groups is carried out using the method of R.H. Cundiff and P.C.

Markunas [Anal. Chem. 33, 1028-1030 (1961)].

Example 3 - Preparation of the (partial) ethyl ester of hyaluronic acid (HY) - 75% of esterified carboxylic groups - 25% of salified carboxylic groups (Na)

5 12.4 g of HY tetrabutylammonium salt with a molecular weight of 250,000 corresponding to 20 m.Eq. of a monomeric unit are solubilized in 620 ml of dimethylsulfoxide at 25°C, 2.5 g (15.9 m.Eq.) of ethyl iodide are added and the resulting solution is kept for 10 12 hours at 30°C.

 A solution containing 62 ml of water and 9 g of sodium chloride is added and the resulting mixture is slowly poured into 3,500 ml of acetone under constant 15 agitation. A precipitate is formed which is filtered and washed three times with 500 ml of acetone/water 5:1 and three times with acetone and finally vacuum dried for eight hours at 30°C.

 The product is then dissolved in 550 ml of water 20 containing 1% of sodium chloride and the solution is slowly poured into 3,000 ml of acetone under constant agitation. A precipitate is formed which is filtered and washed twice with 500 ml of acetone/water 5:1 and three times with 500 ml of acetone and finally vacuum 25 dried for 24 hours at 30°C. 7.9 g of the partial ethyl ester compound in the title are obtained. Quantitative determination of the ester groups is carried out using the method of R.H. Cundiff and P.C. Markunas [Anal. Chem. 33, 1028-1030, (1961)].

Example 4 - Preparation of the (partial) methyl ester of hyaluronic acid (HY) - 75% of esterified carboxylic groups - 25% of salified carboxylic groups (Na)

12.4 g of HY tetrabutylammonium salt with a
5 molecular weight of 80,000 corresponding to 20 m.Eq. of a monomeric unit are solubilized in 620 ml of dimethylsulfoxide at 25°C, 2.26 g (15.9 m.Eq.) of methyl iodide are added and the resulting solution is kept for 12 hours at 30°C.

10 A solution containing 62 ml of water and 9 g of sodium chloride is added and the resulting mixture is slowly poured into 3,500 ml of acetone under constant agitation. A precipitate is formed which is filtered and washed three times with 500 ml of acetone/water 5:1
15 and three times with acetone and finally vacuum dried for eight hours at 30°C.

The product is then dissolved in 550 ml of water containing 1% of sodium chloride and the solution is slowly poured into 3,000 ml of acetone under constant
20 agitation. A precipitate is formed which is filtered and washed twice with 500 ml of acetone/water 5:1 and three times with 500 ml of acetone and finally vacuum dried for 24 hours at 30°C. 7.8 g of the partial methyl ester compound in the title are obtained. Quantitative
25 determination of the ester groups is carried out using the method of R.H. Cundiff and P.C. Markunas [Anal. Chem. 33, 1028-1030 (1961)].

Example 5 - Preparation of the methyl ester of
30 hyaluronic acid (HY)

12.4 g of HY tetrabutylammonium salt with a
molecular weight of 120,000 corresponding to 20 m.Eq. of a monomeric unit are solubilized in 620 ml of dimethylsulfoxide at 25°C, 3 g (21.2 m.Eq.) of methyl
35 iodide are added and the solution is kept for 12 hours

at 30°C.

The resulting mixture is slowly poured into 3,500 ml of ethyl acetate under constant agitation. A precipitate is formed which is filtered and washed four
5 times with 500 ml of ethyl acetate and finally vacuum dried for twenty four hours at 30°C.

8 g of the ethyl ester product in the title are obtained. Quantitative determination of the ester groups is carried out using the method of R.H. Cundiff
10 and P.C. Markunas [Anal. Chem. 33, 1028-1030 (1961)].

Example 6 - Preparation of the ethyl ester of hyaluronic acid (HY)

12.4 g of HY tetrabutylammonium salt with a
15 molecular weight of 85,000 corresponding to 20 m.Eq. of a monomeric unit are solubilized in 620 ml of dimethylsulfoxide at 25°C, 3.3 g (21.2 m.Eq.) of ethyl iodide are added and the solution is kept for 12 hours at 30°C.

20 The resulting mixture is slowly poured into 3,500 ml of ethyl acetate under constant agitation. A precipitate is formed which is filtered and washed four times with 500 ml of ethyl acetate and finally vacuum dried for twenty-four hours at 30°C.

25 8 g of the ethyl ester product in the title are obtained. Quantitative determination of the ester groups is carried out using the method of R.H. Cundiff and P.C. Markunas [Anal. Chem. 33, 1028-1030 (1961)].

30 Example 7 - Preparation of the propyl ester of hyaluronic acid (HY)

12.4 g of HY tetrabutylammonium salt with a
molecular weight of 170,000 corresponding to 20 m.Eq. of a monomeric unit are solubilized in 620 ml of
35 dimethylsulfoxide at 25°C, 3.6 g (21.2 m.Eq.) of propyl

iodide are added and the solution is kept for 12 hours at 30°C.

The resulting mixture is slowly poured into 3,500 ml of ethyl acetate under constant agitation. A precipitate is formed which is filtered and washed four times with 500 ml of ethyl acetate and finally vacuum dried for twenty-four hours at 30°C.

8.3 g of the propyl ester product in the title are obtained. Quantitative determination of the ester groups is carried out using the method of R.H. Cundiff and P.C. Markunas [Anal. Chem. 33, 1028-1030 (1961)].

Example 8 - Preparation of the (partial) butyl ester of hyaluronic acid (HY) - 50% of esterified carboxylic groups - 50% of salified carboxylic groups (Na)

12.4 g of HY tetrabutylammonium salt with a molecular weight of 620,000 corresponding to 20 m.Eq. of a monomeric unit are solubilized in 620 ml of dimethylsulfoxide at 25°C, 1.95 g (10.6 m.Eq.) of n-butyl iodide are added and the resulting solution is kept for 12 hours at 30°C.

A solution containing 62 ml of water and 9 g of sodium chloride is added and the resulting mixture is slowly poured into 3,500 ml of acetone under constant agitation. A precipitate is formed which is filtered and washed three times with 500 ml of acetone/water 5:1 and three times with acetone and finally vacuum dried for eight hours at 30°C.

The product is then dissolved in 550 ml of water containing 1% of sodium chloride and the solution is slowly poured into 3,000 ml of acetone under constant agitation. A precipitate is formed which is filtered and washed twice with 500 ml of acetone/water 5:1 and three times with 500 ml of acetone and finally vacuum dried for 24 hours at 30°C. 8 g of the partial butyl

ester compound in the title are obtained. Quantitative determination of the ester groups is carried out using the method of R.H. Cundiff and P.C. Markunas [Anal. Chem. 33, 1028-1030 (1961)].

5

Example 9 - Preparation of the (partial) ethoxy-carbonylmethyl ester of hyaluronic acid (HY) - 75% of esterified carboxylic groups - 25% of salified carboxylic groups (Na)

10 12.4 g of HY tetrabutylammonium salt with a molecular weight of 180,000 corresponding to 20 m.Eq. of a monomeric unit are solubilized in 620 ml of dimethylsulfoxide at 25°C, 2 g of tetrabutylammonium iodide and 1.84 g (15 m.Eq.) of ethyl chloroacetate are
15 added and the resulting solution of kept for 24 hours at 30°C.

 A solution containing 62 ml of water and 9 g of sodium chloride is added and the resulting mixture is slowly poured into 3,500 ml of acetone under constant
20 agitation. A precipitate is formed which is filtered and washed three times with 500 ml of acetone/water 5:1 and three times with acetone and finally vacuum dried for eight hours at 30°C.

 The product is then dissolved in 550 ml of water
25 containing 1% of sodium chloride and the solution is slowly poured into 3,000 ml of acetone under constant agitation. A precipitate is formed which is filtered and washed twice with 500 ml of acetone/water 5:1 and three times with 500 ml of acetone and finally vacuum
30 dried for 24 hours at 30°C. 10 g of the partial ethoxycarbonyl methyl ester compound in the title are obtained.

 Quantitative determination of the ethoxylic ester groups is carried out using the method of R.H. Cundiff
35 and P.C. Markunas [Anal. Chem. 33, 1028-1030 (1961)].

Example 10 - Preparation of the n-pentyl ester of hyaluronic acid (HY)

12.4 g of HY tetrabutylammonium salt with a molecular weight of 620,000 corresponding to 20 m.Eq. of a monomeric unit are solubilized in 620 ml of dimethylsulfoxide at 25°C, 3.8 g (25 m.Eq.) of n-pentyl bromide and 0.2 g of iodide tetrabutyl-ammonium are added, the solution is kept for 12 hours at 30°C.

The resulting mixture is slowly poured into 3,500 ml of ethyl acetate under constant agitation. A precipitate is formed which is filtered and washed four times with 500 ml of ethyl acetate and finally vacuum dried for twenty four hours at 30°C.

8.7 g of the n-pentyl ester product in the title are obtained. Quantitative determination of the ester groups is carried out using the method described on pages 169-172 of Siggia S. and Hann J.G. "Quantitative organic analysis via functional groups" 4th Edition, John Wiley and Sons.

20

Example 11 - Preparation of the isopentyl ester of hyaluronic acid (HY)

12.4 g of HY tetrabutylammonium salt with a molecular weight of 170,000 corresponding to 20 m.Eq. of a monomeric unit are solubilized in 620 ml of dimethylsulfoxide at 25°C, 3.8 g (25 m.Eq.) of isopentyl bromide and 0.2 g of tetrabutylammonium iodide are added, the solution is kept for 12 hours at 30°C.

The resulting mixture is slowly poured into 3,500 ml of ethyl acetate under constant agitation. A precipitate is formed which is filtered and washed four times with 500 ml of ethyl acetate and finally vacuum dried for twenty four hours at 30°C.

8.6 g of the isopentyl ester product featured in the title are obtained. Quantitative determination of

the ester groups is carried out according to the method described on pages 169-172 of Siggia S. and Hanna J.G. "Quantitative organic analysis via functional groups" 4th Edition, John Wiley and Sons.

5

Example 12 - Preparation of the benzylester of hyaluronic acid (HY)

12.4 g of HY tetrabutylammonium salt with a molecular weight of 170,000 corresponding to 20 m.Eq. of a monomeric unit are solubilized in 620 ml of dimethylsulfoxide at 25°C, 4.5 g (25 m.Eq.) of benzyl bromide and 0.2 g of tetrabutylammonium iodide are added, the solution is kept for 12 hours at 30°C.

The resulting mixture is slowly poured into 3,500 ml of ethyl acetate under constant agitation. A precipitate is formed which is filtered and washed four times with 500 ml of ethyl acetate and finally vacuum dried for twenty four hours at 30°C.

9 g of the benzyl ester product in the title are obtained. Quantitative determination of the ester groups is carried out according to the method described on pages 169-172 of Siggia S. and Hanna J.G. "Quantitative organic analysis via functional groups" 4th Edition, John Wiley and Sons.

25

Example 13 - Preparation of the β -phenylethyl ester of hyaluronic acid (HY)

12.4 g of HY tetrabutylammonium salt with a molecular weight of 125,000 corresponding to 20 m.Eq. of a monomeric unit are solubilized in 620 ml of dimethylsulfoxide at 25°C, 4.6 g (25 m.Eq.) of 2-bromoethylbenzene and 185 mg of tetrabutylammonium iodide are added, and the solution is kept for 12 hours at 30°C.

The resulting mixture is slowly poured into 3,500

ml of ethyl acetate under constant agitation. A precipitate is thus formed which is then filtered and washed four times with 500 ml of ethyl acetate and finally vacuum dried for twenty four hours at 30°C.

5 9.1 g of the β -phenylethyl ester in the title are obtained. Quantitative determination of the ester groups is carried out according to the method described on page 168-172 of Siggia S. and hanna J.G. "Quantitative organic analysis via functional groups"
10 4th Edition, John Wiley and Sons.

Example 14 - Preparation of the benzyl ester of hyaluronic acid (HY)

3 g of the potassium salt of HY with a molecular weight of 162,000 are suspended in 200 ml of dimethylsulfoxide; 120 mg of tetrabutylammonium iodide and 2.4 g of benzyl bromide are added.

The suspension is kept in agitation for 48 hours at 30°C. The resulting mixture is slowly poured into 1,000
20 ml of ethyl acetate under constant agitation. A precipitate is formed which is filtered and washed four times with 150 ml of ethyl acetate and finally vacuum dried for twenty four hours at 30°C.

3.1 g of the benzyl ester product in the title are
25 obtained. Quantitative determination of the ester groups is carried out according to the method described on pages 169-172 of Siggia S. and Hanna J.G. "Quantitative organic analysis via functional groups"
4th Edition, John Wiley and Sons.

30

Example 15 - Preparation of the (partial propyl) ester of hyaluronic acid (HY) - 85% of esterified carboxylic groups - 15% of salified carboxylic groups (Na)

12.4 g of HY tetrabutylammonium salt with a
35 molecular weight of 165,1000 corresponding to 20 m.Eq.

of a monomeric unit are solubilized in 620 ml of dimethylsulfoxide at 25°C, 2.9 g (17 m.Eq.) of propyl iodide are added and the resulting solution is kept for 12 hours at 30°C.

5 A solution is then added containing 62 ml of water and 9 g of sodium chloride and the resulting mixture is slowly poured into 3,500 ml of acetone under constant agitation. A precipitate is formed which is filtered and washed three times with 500 ml of acetone/water 5:1
10 and three times with acetone and finally vacuum dried for eight hours at 30°C.

 The product is then dissolved in 550 ml of water containing 1.% of sodium chloride and the solution is slowly poured into 3,000 ml of acetone under constant
15 agitation. A precipitate is formed which is filtered and washed twice with 500 ml of acetone/water 5:1 and three times with 500 ml of acetone and finally vacuum dried for 24 hours at 30°C. 8 g of the partial propyl ester compound in the title are obtained. Quantitative
20 determination of the ester groups is carried out using the method of R.H. Cundiff and P.C. Markunas [Anal. Chem. 33, 1028-1030 (1961)].

25 Example 16 - Preparation of the n-octyl ester of hyaluronic acid (HY)

 12.4 g of HY tetrabutylammonium salt with a molecular weight of 170.000 corresponding to 20 m.Eq. of a monomeric unit are solubilized in 620 ml of dimethylsulfoxide at 25°C, 4.1 g (21.2 m.Eq.) of
30 1-bromooctane are added and the solution is kept for 12 hours at 30°C.

 The resulting mixture is slowly poured into 3,500 ml of ethyl acetate under constant agitation. A precipitate is formed which is filtered and washed four
35 times with 500 ml of ethyl acetate and finally vacuum

dried for 24 hours at 30°C. 9.3 g of the octyl ester product in the title are obtained. Quantitative determination of the ester groups is carried out using the method described in Siggia S. and Hanna J.G. "Quantitative organic analysis via functional groups", 4th Edition, John Wiley and Sons, pages 169-172.

Example 17 - Preparation of the isopropyl ester of hyaluronic acid (HY)

12.4 g of HY tetrabutylammonium salt with a molecular weight of 170.000 corresponding to 20 m.Eq. of a monomeric unit are solubilized in 620 ml of dimethylsulfoxide at 25°C, 2.6 g (21.2 m.Eq.) of isopropyl bromide are added and the solution is kept for 12 hours at 30°C.

The resulting mixture is slowly poured into 3,500 ml of ethyl acetate under constant agitation. A precipitate is formed which is filtered and washed four times with 500 ml of ethyl acetate and finally vacuum dried for 24 hours at 30°C. 8.3 g of the isopropyl ester product in the title are obtained. Quantitative determination of the ester groups is carried out using the method of R.H. Cundiff and P.C. Markunas (Anal. Chem. 33, 1028-1030, 1961).

Example 18 - Preparation of the 2,6-dichlorobenzyl ester of hyaluronic acid (HY)

12.4 g of HY tetrabutylammonium salt with a molecular weight of 170.000 corresponding to 20 m.Eq. of a monomeric unit are solubilized in 620 ml of dimethylsulfoxide at 25°C, 5.08 g (21.2 m.Eq.) of 2,6-dichlorobenzyl bromide are added and the solution is kept for 12 hours at 30°C.

The resulting mixture is slowly poured into 3,500 ml of ethyl acetate under constant agitation. A

precipitate is formed which is filtered and washed four times with 500 ml of ethyl acetate and finally vacuum dried for 24 hours at 30°C. 9.7 g of the 2,6-dichlorobenzyl ester product in the title are
5 obtained. Quantitative determination of the ester groups is carried out using the method described in Siggia S. and Hanna J.G. "Quantitative organic analysis via functional groups", 4th Edition, John Wiley and Sons, pages 169-172.

10

Example 19 - Preparation of the 4-terbutylbenzyl ester of hyaluronic acid (HY)

12.4 g of HY tetrabutylammonium salt with a molecular weight of 170,000 corresponding to 20 m.Eq. of
15 a monomeric unit are solubilized in 620 ml of dimethylsulfoxide at 25°C, 4.81 g (21.2 m.Eq.) of 4-terbutylbenzyl bromide are added and the solution is kept for 12 hours at 30°C.

The resulting mixture is slowly poured into 3,500
20 ml of ethyl acetate under constant agitation. A precipitate is formed which is filtered and washed four times with 500 ml of ethyl acetate and finally vacuum dried for 24 hours at 30°C. 9.8 g of the 4-terbutylbenzyl ester product in the title are
25 obtained. Quantitative determination of the ester groups is carried out using the method described in Siggia S. and Hanna J.G. "Quantitative organic analysis via functional groups", 4th Edition, John Wiley and Sons, pages 169-172.

30

Example 20 - Preparation of the Heptadecyl ester of hyaluronic acid (HY)

12.4 g of HY tetrabutylammonium salt with a molecular weight of 170,000 corresponding to 20 m.Eq. of
35 a monomeric unit are solubilized in 620 ml of

dimethylsulfoxide at 25°C, 6.8 g (21.2 M.Eq.) of Heptadecyl bromide are added and the solution is kept for 12 hours at 30°C.

The resulting mixture is slowly poured into 3,500 ml of ethyl acetate under constant agitation. A precipitate is formed which is filtered and washed four times with 500 ml of ethyl acetate and finally vacuum dried for 24 hours at 30°C. 11 g of the Heptadecyl ester product in the title are obtained. Quantitative determination of the ester groups is carried out using the method described in Siggia S. and Hanna J.G. "Quantitative organic analysis via functional groups", 4th Edition, John Wiley and Sons, pages 169-172.

Example 21 - Preparation of the Octadecyl ester of hyaluronic acid (HY)

12.4 g of HY tetrabutylammonium salt with a molecular weight of 170,000 corresponding to 20 m.Eq. of a monomeric unit are solubilized in 620 ml of dimethylsulfoxide at 25°C, 7.1 g (21.2 m.Eq.) of octadecyl bromide are added and the solution is kept for 12 hours at 30°C.

The resulting mixture is slowly poured into 3,500 ml of ethyl acetate under constant agitation. A precipitate is formed which is filtered and washed four times with 500 ml of ethyl acetate and finally vacuum dried for 24 hours at 30°C. 11 g of the octadecyl ester product in the title are obtained. Quantitative determination of the ester groups is carried out using the method described in Siggia S. and Hanna J.G. "Quantitative organic analysis via functional groups", 4th Edition, John Wiley and Sons, pages 169-172.

Example 22 - Preparation of the 3-phenylpropyl ester of hyaluronic acid (HY)

12.4 g of HY tetrabutylammonium salt with a

molecular weight of 170,000 corresponding to 20 m.Eq. of a monomeric unit are solubilized in 620 ml of dimethylsulfoxide at 25°C, 4.22 g (21.2 m.Eq.) of 3-phenylpropyl bromide are added and the solution is
5 kept for 12 hours at 30°C.

The resulting mixture is slowly poured into 3,500 ml of ethyl acetate under constant agitation. A precipitate is formed which is filtered and washed four times with 500 ml of ethyl acetate and finally vacuum
10 dried for 24 hours at 30°C. 9 g of the 3-phenylpropyl ester product in the title are obtained. Quantitative determination of the ester groups is carried out using the method described in Siggia S. and Hanna J.G. "Quantitative organic analysis via functional groups",
15 4th Edition, John Wiley and Sons, pages 169-172.

Example 23 - Preparation of the 3,4,5-trimethoxy-benzyl ester of hyaluronic acid (HY)

12.4 g of HY tetrabutylammonium salt with a
20 molecular weight of 170,000 corresponding to 20 M.Eq. of a monomeric unit are solubilized in 620 ml of dimethylsulfoxide at 25°C, 4.6 g (21.2 m.Eq.) of 3,4,5-trimethoxybenzyl chloride are added and the solution is kept for 12 hours at 30°C.

25 The resulting mixture is slowly poured into 3,500 ml of ethyl acetate under constant agitation. A precipitate is formed which is filtered and washed four times with 500 ml of ethyl acetate and finally vacuum dried for 24 hours at 30°C. 10 g of the
30 3,4,5-trimethoxybenzyl ester product in the title are obtained. Quantitative determination of the ester groups is carried out using the method described in Siggia S. and Hanna J.G. "Quantitative organic analysis via functional groups", 4th Edition, John Wiley and
35 Sons, pages 169-172.

Example 24 - Preparation of the Cinnamyl ester of hyaluronic acid (HY)

12.4 g of Hy tetrabutylammonium salt with a molecular weight of 170,000 corresponding to 20 m.Eq. of a monomeric unit are solubilized in 620 ml of dimethylsulfoxide at 25°C, 4.2 g (21.2 m.Eq.) of Cinnamyl bromide are added and the solution is kept for 12 hours at 30°C.

The resulting mixture is slowly poured into 3,500 ml of ethyl acetate under constant agitation. A precipitate is formed which is filtered and washed four times with 500 ml of ethyl acetate and finally vacuum dried for 24 hours at 30°C. 9.3 g of the Cinnamyl ester product in the title are obtained. Quantitative determination of the ester groups is carried out using the method described in Siggia S. and Hanna J.G. "Quantitative organic analysis via functional groups", 4th Edition, John Wiley and Sons, pages 169-172.

Example 25 - Preparation of the Decyl ester of hyaluronic acid (HY)

12.4 g of HY tetrabutylammonium salt with a molecular weight of 170,000 corresponding to 20 m.Eq. of a monomeric unit are solubilized in 620 ml of dimethylsulfoxide at 25°C, 4.7 g (21.2 m.Eq.) of 1-bromo decane are added and the solution is kept for 12 hours at 30°C.

The resulting mixture is slowly poured into 3,500 ml of ethyl acetate under constant agitation. A precipitate is formed which is filtered and washed four times with 500 ml of ethyl acetate and finally vacuum dried for 24 hours at 30°C. 9.5 g of the Decyl ester product in the title are obtained. Quantitative determination of the ester groups is carried out using the method described in Siggia S. and Hanna J.G.

"Quantitative organic analysis via functional groups",
4th Edition, John Wiley and Sons, pages 169-172.

5 Example 26 - Preparation of the Nonyl ester of
 hyaluronic acid (HY)

 12.4 g of HY tetrabutylammonium salt with a
 molecular weight of 170,000 corresponding to 20 m.Eq. of
 a monomeric unit are solubilized in 620 ml of
10 dimethylsulfoxide at 25°C, 4.4 g (21.2 m.Eq.) of 1-bromo
 nonane are added and the solution is kept for 12 hours
 at 30°C.

 The resulting mixture is slowly poured into 3,500
 ml of ethyl acetate under constant agitation. A
 precipitate is formed which is filtered and washed four
15 times with 500 ml of ethyl acetate and finally vacuum
 dried for 24 hours at 30°C. 9 g of the Nonyl ester
 product in the title are obtained. Quantitative
 determination of the ester groups is carried out using
 the method described in Siggia S. and Hanna J.G.
20 "Quantitative organic analysis via functional groups",
 4th Edition, John Wiley and Sons, pages 169-172.

The Esters of Alginic Acid

 The alginic acid esters which can be employed in
25 the present invention can be prepared as described in
 EPA 0 251 905 A2 by starting with quaternary ammonium
 salts of alginic acid with an etherifying agent in a
 preferably aprotic organic solvent, such as
 dialkylsulfoxides, dialkylcarboxamides, such as in
30 particular lower alkyl dialkylsulfoxides, above all
 dimethylsulfoxide, and lower alkyl dialkylamides of
 lower aliphatic acids, such as dimethyl or diethyl
 formamide or dimethyl or diethyl acetamide. It is
 possible, however, to use other solvents which are not
35 always aprotic, such as alcohols, ethers, detones,

esters, especially aliphatic or heterocyclic alcohols and ketones with a low boiling point, such as hexafluoroisopropanol and trifluoroethanol. The reaction is brought about preferably at a temperature of
5 between about 0° and 100°C, and especially between about 25° and 75°C, for example at about 30°C.

Esterification is carried out preferably by gradually adding the esterifying agent to the above-mentioned ammonium salt dissolved in one of the solvents
10 mentioned, for example in dimethylsulfoxide. As alkylating agents, those mentioned above can be used, especially hydrocarbyl halides, for example alkyl halides.

The preferred esterification process, therefore,
15 comprises reacting, in an organic solvent, a quaternary ammonium salt of alginic acid with a stoichiometric quantity of a compound of the formula



wherein A is selected from the group consisting of an
20 aliphatic, araliphatic, cycloaliphatic, aliphatic-cycloaliphatic and heterocyclic radicals, and X is a halogen atom, and wherein said stoichiometric quantity of A-X is determined by the degree of esterification desired.

As starting quaternary ammonium salts, it is
25 preferable to use lower ammonium tetraalkylates, the alkyl groups having preferably between 1 and 6 carbon atoms. Mostly, the alginate of tetrabutylammonium is used. These quaternary ammonium salts can be prepared
30 by reacting a metal salt of alginic acid, preferably one of those mentioned above, especially the sodium or potassium salt, in aqueous solution with a sulfonic resin salified with the quaternary ammonium base.

One variation of the previously specified procedure
35 consists of reacting a potassium or sodium salt of

alginic acid, suspended in a suitable solution such as dimethylsulfoxide, with a suitable alkylating agent in the presence of a catalyzing quantity of a quaternary ammonium salt, such as tetrabutylammonium iodide. This procedure makes it possible to obtain the total esters of alginic acid.

To prepare new esters it is possible to use alginic acids of any origin. The preparation of these acids is described in literature. It is preferable to use purified alginic acids.

In the partial esters, it is possible to salify all the remaining carboxy groups or only part of these, dosing the base quantity so as to obtain the desired stoichiometric degree of salification. By correctly gauging the degree of salification, it is possible to obtain esters with a wide range of different dissociation constants, thereby giving the desired pH in solutions or "in situ" at the time of therapeutic application.

ALAFF 11, the benzyl ester of alginic acid, and ALAFF 7, the ethyl ester of alginic acid, are particularly useful in the present composite membranes.

For purely illustrative purposes, reported below are some examples of how composite membranes encompassed by the present invention can be produced, and how they can be employed in practice.

EXAMPLE 27

A composite membrane comprising the hyaluronic acid benzyl ester HYAFF 11, i.e., hyaluronic acid esterified 100% with benzyl alcohol, with a mesh reinforcement comprising the hyaluronic acid ethyl ester HYAFF 7, i.e., hyaluronic acid esterified 100% with ethanol, basis weight 14 mg/cm², 0.25 mm thick, minimum tensile

strength at break and elongation when dry, 400 Kg/cm² and 7%, respectively, minimum tensile strength and elongation when wet, 50 Kg/cm² and 55%, respectively, tear strength when dry, 90 Kg/cm², tear strength when wet, 50 Kg/cm², was produced according to the following procedure.

The HYAFF 7 mesh was obtained starting with a solution of HYAFF 7 dimethylsulfoxide at a concentration of 125 mg/ml prepared in vessel (1) shown in Fig. 1. The solution is fed by a gear metering pump (2) into a spinneret for wet extrusion composed of 100 holes each measuring 65 microns in diameter.

The extruded multiple thread is passed into a coagulation bath (3) containing absolute ethanol and is then moved over transporting rollers into three successive rinsing baths (4,5,6), also containing absolute ethanol. The ratio between the speed of the third roller (III) and the speed of the first roller (I) is called the drafting ratio, and has a value of 1.05, while the speeds of the single rollers are: 23 rpm (roller I), 24 rpm (rollers II and III), 25 rpm (roller IV). Once the multiple thread has been passed through the rinsing baths it is dried with warm air (7) at a temperature of 45°C and wound onto a winding frame (8). The thread is 237 denier. The multiple thread is then twisted 135 times per meter and woven on a loom into a smooth knitted fabric with a gauge of 14 (9,10). From the loom the fabric is fed through a calendar (11), which thins it down. Figure 2 shows the mesh which results from said process.

The polymeric matrix is applied by two airbrushes (14) which spray a solution of HYAFF 11 in dimethylsulfoxide at a concentration of 40 mg/ml. The mesh thus sprayed is passed into a coagulation bath (15)

containing absolute ethanol, into a rinsing chamber containing pure, distilled water (6) and into a special drying chamber with a temperature of 50°C (17). Figure 3 shows the finished product.

5

EXAMPLE 28

A reinforced membrane comprising a matrix of a partial benzyl ester (75%) of hyaluronic acid, HYAFF 11p75, with a mesh reinforcement comprising hyaluronic acid total benzyl ester HYAFF 11, basis weight 10 mg/cm², 0.15 mm thick, minimum tensile strength at break and elongation when dry, 300 Kg/cm² and 4%, respectively, minimum tensile strength at break and elongation when wet 40 Kg/cm² and 45%, respectively, tear strength when dry 120 Kg/cm², and when wet 60 g/cm², was produced by the following procedure.

HYAFF 11p75 is prepared as follows. 10 g of hyaluronic acid tetrabutylammonium salt, mw=620.76, equal to 16.1 nmole, are solubilized in a mixture of N-methyl pyrrolidone/H₂O, 90/10, 2.5% in weight, to obtain 400 mls of solution. The solution is cooled to 10°C, then purified N₂ is bubbled through it for 30 minutes. This is then esterified with 1.49 ml (equal to 12.54 mmole) of benzyl bromide. The solution is gently shaken for 60 hours at 15-20°C.

Subsequent purification is achieved by precipitation in ethyl acetate following the addition of a saturated solution of sodium chloride, and subsequent washings with a mixture of ethyl acetate/absolute ethanol, 80/20. The solid phase is separated by filtration, and treated with anhydrous acetone. 6.8 g of product are thus obtained, equal to a yield of about 95%.

The HYAFF 11 mesh was produced starting from a

solution of HYAFF 11 in dimethylsulfoxide at a concentration of 145 mg/ml prepared in vessel (1) shown in Fig. 1. The solution is fed by a gear metering pump (2) into a spinneret for wet extrusion composed of 70
5 holes each measuring 50 microns in diameter. The extruded multiple thread is passed into a coagulation bath (3) containing 90% absolute ethanol and 10% pure, distilled water, and is then moved over transporting rollers into three successive rinsing baths (4,5,6)
10 these also containing 90% absolute ethanol and 10% pure, distilled water. The ratio between the speed of the third roller (III) and the speed of the first roller (I) is called the drafting ratio, and has a value of 1.03, while the speeds of the single rollers are: 20 rpm
15 (roller I), 21 rpm (rollers II and III), 22 rpm (roller IV). Once the multiple thread has been passed through the rinsing baths it is dried with warm air (7) at a temperature of 47°C and wound onto a winding frame (8). The resulting thread is 150 denier. The multiple thread
20 is then twisted 90 times per meter and woven on a loom into a smooth knitted fabric with a gauge of 12 (9,10). From the loom the fabric is fed through a calendar (11) which thins it down.

The polymeric matrix is applied by two airbrushes
25 (14) which spray the mesh with a solution of HYAFF 11p75 in dimethylsulfoxide at a concentration of 30 mg/ml. The mesh thus sprayed is passed into a coagulation bath (15) containing absolute ethanol, into a rinsing chamber containing pure, distilled water (16) and into a special
30 drying chamber with a temperature of 45°C (17).

EXAMPLE 29

A composite membrane comprising a matrix of a partial benzyl ester (75%) of hyaluronic acid, HYAFF
35 11p75, with a mesh reinforcement comprising a mixture of

fibers of hyaluronic acid total benzyl ester, HYAFF 11, and alginic acid benzyl ester, ALAFF 11, in equal percentages, basis weight 16 mg/cm², 0.25 mm thick, minimum tensile strength at break and elongation when dry, 350 Kg/cm² and 5%, respectively, minimum tensile strength at break and elongation when wet, 100 Kg/cm² and 35%, respectively, tear strength when dry 110 Kg/cm², and when wet, 70 Kg/cm², was produced by the following procedure.

10 Alginic acid benzyl ester ALAFF 11 was prepared as described in U.S. Patent 5,147,861 and EPA 0 251 905 A2. 10 g (23.9 m.Eq.) of the tetrabutylammonium salt of alginic acid are solubilized in 400 ml of DMSO at 25°C. 4.45 g (26 m.Eq.) of benzyl bromide and 0.1 g of
15 tetrabutylammonium iodide are added.

 The solution is agitated well for 12 hours at 30°C, and then slowly poured by regular drops and under agitation into 3.5 l of ethyl acetate (or toluene). The precipitate is filtered and then washed 4 times with
20 ethyl acetate, and vacuum dried for 24 hours at 30°C. In this way, 5 g of the compound are obtained.

 The mesh formed from a multiple thread of HYAFF 11 and ALAFF 11 in equal percentages was obtained starting from two distinct multifilaments, one of HYAFF 11 at 60
25 denier, and the other of ALAFF 11 at 75 denier.

 The multifilament of HYAFF 11 was obtained as described in Example 2, while the multifilament of ALAFF 11 was obtained as follows. A solution of ALAFF 11 in dimethylsulfoxide at a concentration of 100 mg/ml is
30 prepared in vessel (1) shown in Fig. 1. The solution is fed by a gear metering pump (2) into a spinneret for wet extrusion composed of 35 holes, each measuring 50 microns in diameter. The extruded multiple thread is passed into a coagulation bath (3) containing 45%

absolute ethanol, 45% ethyl acetate and 10% pure, distilled water. It is then moved over transporting rollers into three successive rinsing baths (4,5,6) containing acetone. The ratio between the speed of the
5 third roller (III) and the speed of the first roller (I) is called the drafting ratio, and has a value of 1.1, while the speeds of the single rollers are: 20 rpm (roller I), 21 rpm (rollers II and III), 22 rpm (roller IV). Once the multiple thread has been passed through
10 the rinsing baths it is dried with warm air (7) at a temperature of 55°C and wound onto a winding frame (8). The 60 denier HYAFF 11 thread and the 75 denier ALAFF 11 thread are combined on a twisting machine, producing a
15 twisted 90 times per meter and woven on a loom into a smooth knitted fabric with a gauge of 12 (9,10). From the loom the fabric is fed through a calendar (11) which thins it down.

The polymeric matrix is applied by two airbrushes
20 (14) which spray a solution of HYAFF 11p75 in dimethylsulfoxide at a concentration of 30 mg/ml. Thus sprayed, the mesh is passed into a coagulation bath (15) containing absolute ethanol, into a rinsing chamber containing pure, distilled water (16) and into a special
25 drying chamber with a temperature of 45°C (17).

EXAMPLE 30

The mechanical and biological advantages of the composite membranes according to the present invention
30 have been demonstrated by a series of clinical and periodontal surgical experiments conducted using the material described in Example 1 according to standard guided tissue regeneration (GTR) protocols. Such protocols require the material to be placed following
35 suitable surgical techniques by suturation to the site

of application to enhance the formation of new tissues to replace those damaged or destroyed by various periodontal pathologies.

Such lesions have in common the loss of the original structure of periodontal tissue and introflexion into the cavities thus formed in the mucogingival tissue. This leads to imperfect healing with debilitating effects on the function, structure and stability of the dental elements involved. Two types of defects were studied. The first involved periradicular lesions of various kinds (to one or more walls, partially or completely exposed bifurcations, circular or semicircular defects). The second type involved bone ridges that are too fine to support a normal tooth replacement or the insertion of an implant. Reference values included the intactness of the reinforced membrane at the site and at the time of its application (maximum intactness is defined as +++), inflammation of the tissues above the membrane (maximum inflammation is defined as +++), reduction in the defect thirty days after surgery (maximum reduction is defined as +++), and reabsorption of the inserted material (maximum reabsorption is defined as +++). Table 2 shows examples of data relative to surgical operations on humans in clinical experiments using composite membranes such as those described in Example 27.

TABLE 2

CASE	TYPE OF OPERATION	INTACTNESS	INFLAMATION	REDUCTION IN DEFECT (30 DAYS)	REABSORPTION
CASE 1	1	+++	---	++-	++-
CASE 2	1	+++	++-	++-	++-
CASE 3	1	+++	---	+++	+++
CASE 4	1	+++	---	++-	++-

5	CASE 5	1	+++	+-	+++	+++
	CASE 6	1	+++	+-	++-	++-
	CASE 7	1	+++	++-	++-	++-
	CASE 8	1	+++	+-	+++	+++
	CASE 9	1	+++	+-	++-	++-
10	CASE 10	1	+++	+-	++-	++-
	CASE 11	1	+++	++-	++-	++-
	CASE 12	1	+++	+-	++-	++-
	CASE 13	2	+++	++-	+++	++-
	CASE 14	2	+++	++-	++-	+-
15	CASE 15	2	+++	+++	+-	+-
	CASE 16	2	+++	++-	++-	+-
	CASE 17	2	+++	++-	++-	++-
	1 = PERIRADICULAR LESION 2 = BUILD UP OF BONE RIDGE					

The results presented in Table 2 show that the composite membranes according to the present invention successfully associate biocompatibility, bioabsorbability and biodegradability with a high degree of mechanical resistance. This combination of properties is not present in other products used for the same application in periodontal surgery, demonstrating the superiority of the present composite membranes over conventional products.

The invention being thus described, it will be obvious that the same may be varied in many ways. Such variations are not to be regarded as a departure from the spirit and scope of the invention, and all such modifications as would be obvious to one skilled in the art are intended to be included within the scope of the following claims.

CLAIMS

1. A composite membrane, comprising a reinforcing mesh embedded in a polymeric matrix, wherein said mesh comprises at least one material selected from the group consisting of hyaluronic acid or a derivative thereof, and alginic acid or a derivative thereof, and said matrix comprises at least one material selected from the group consisting of hyaluronic acid or a derivative thereof, alginic acid or a derivative thereof, and a gelled polysaccharide.

2. The composite membrane of claim 1, wherein said derivative of hyaluronic acid is a hyaluronic acid ester.

3. The composite membrane of claim 1, wherein said derivative of alginic acid is an alginic acid ester.

4. The composite membrane of claim 1, wherein said gelled polysaccharide is at least one member selected from the group consisting of chitin, an alginate, chitosan, gellan, a synthetic derivative of any one of the foregoing, and a semisynthetic derivative of any one of the foregoing.

5. The composite membrane of claim 2, wherein said hyaluronic acid ester is present alone, or in combination with other hyaluronic acid esters.

6. The composite membrane of claim 3, wherein said alginic acid ester is present alone, or in combination with other alginic acid esters.

7. The composite membrane of claim 1, wherein said composite membrane comprises a single hyaluronic acid ester or a mixture of different hyaluronic acid esters.

8. The composite membrane of claim 1, wherein said composite membrane comprises a single alginic acid ester or a mixture of different alginic acid esters.

9. The composite membrane of claim 1, wherein said composite membrane comprises a mixture of a hyaluronic acid ester and an alginic acid ester.

10. The composite membrane of claim 1, wherein said composite membrane comprises a mixture of hyaluronic acid esters and alginic acid esters.

11. The composite membrane of claim 1, wherein said composite membrane comprises a mixture of hyaluronic acid esters, alginic acid esters, and at least one gelled polysaccharide selected from the group consisting of chitin, an alginate, chitosan, gellan, a synthetic derivative thereof, and a semisynthetic derivative thereof.

12. The composite membrane of claim 1, wherein both said mesh and said matrix comprise hyaluronic acid or a derivative thereof.

13. The composite membrane of claim 12, wherein said derivative is a hyaluronic acid ester.

14. The composite membrane of claim 13, wherein said mesh comprises the ethyl ester of hyaluronic acid, and said matrix comprises the benzyl ester of hyaluronic acid.

15. The composite membrane of claim 13, wherein said mesh comprises the benzyl ester of hyaluronic acid, and said matrix comprises a partial benzyl ester of hyaluronic acid.

16. The composite membrane of claim 15, wherein said partial benzyl ester of hyaluronic acid is a 75% benzyl ester of hyaluronic acid.

17. The composite membrane of claim 13, wherein said mesh comprises the ethyl ester of hyaluronic acid, and said matrix comprises a partial benzyl ester of hyaluronic acid.

18. The composite membrane of claim 17, wherein said partial benzyl ester of hyaluronic acid is a 75% benzyl ester of hyaluronic acid.

19. The composite membrane of claim 1, wherein said mesh comprises a mixture of fibers of hyaluronic acid benzyl ester and alginic acid benzyl ester, and said matrix comprises a partial benzyl ester of hyaluronic acid.

20. The composite membrane of claim 19, wherein said fibers are present in equal amounts, and wherein said partial benzyl ester of hyaluronic acid is a 75%

benzyl ester of hyaluronic acid.

21. The composite membrane of claim 1, having a basis weight between about 8 g/cm² and about 50 g/cm², a gauge of about 0.08 mm to about 0.5 mm, a minimum tensile strength at break when dry between about 100 Kg/cm² and about 500 Kg/cm², elongation when dry between about 3% and about 12%, a minimum tensile strength at break when wet between about 30 Kg/cm² and about 450 Kg/cm² and elongation when wet between about 20% and about 60%, and a tear strength when dry between about 40 Kg/cm² and about 200 Kg/cm² and tear strength when wet between about 20 Kg/cm² and about 160 Kg/cm².

22. The composite membrane of claim 1, having a basis weight of about 14 mg/cm², a gauge from about 0.25 mm, a minimum tensile strength at break when dry from about 400 Kg/cm², elongation when dry, about 7%, a minimum tensile strength at break when wet from about 50 Kg/cm² and elongation when wet, about 55%, with a tear strength when dry, about 90 Kg/cm² and tear strength when wet, about 50.

23. The composite membrane of claim 1, having a basis weight of about 10 mg/cm², a gauge from about 0.15 mm, a minimum tensile strength at break when dry from about 300 Kg/cm², elongation when dry, about 4%, a minimum tensile strength at break when wet from about 40 Kg/cm² and elongation when wet, about 45%, with a tear strength when dry, about 120 Kg/cm² and tear strength when wet, about 60.

24. The composite membrane of claim 1, wherein

said reinforcing mesh comprises a multifilament mesh comprising multiple threads of between about 30 and about 120 strands between about 18 microns and about 35 microns in diameter, wherein the thread is between about 150 and about 400 denier, wherein the multifilaments are twisted between about 90 and about 200 times per meter, and which is worked into a knitted fabric with a gauge between about 10 and about 16.

25. The composite membrane of claim 1, wherein said reinforcing mesh comprises a multifilament mesh comprising multiple threads of at least 100 strands, wherein the thread is about 237 denier, and wherein the multifilaments are twisted about 135 times per meter, and which is worked into a knitted fabric with a gauge of about 14.

26. The composite membrane of claim 1, wherein said reinforcing mesh comprises a multifilament mesh comprising multiple threads of about 70 strands, wherein the thread is about 150 denier, and wherein the multifilaments are twisted about 90 times per meter, and which is worked into a knitted fabric with a gauge of about 12.

27. The composite membrane of claim 2 or 3, wherein the alcohol of said ester is a pharmacologically inactive alcohol.

28. The composite membrane of claim 27, wherein said alcohol is an aliphatic, araliphatic, cycloaliphatic, or heterocyclic alcohol.

29. The composite membrane of claim 2 or 3, wherein the alcohol of said ester is a pharmacologically

active alcohol.

30. A method for the guided regeneration of tissues, comprising securing a superficial or internal lesion with a composite membrane comprising a reinforcing mesh embedded in a polymeric matrix, wherein said mesh comprises at least one material selected from the group consisting of hyaluronic acid or a derivative thereof, and alginic acid or a derivative thereof, and said matrix comprises at least one material selected from the group consisting of hyaluronic acid or a derivative thereof, alginic acid or a derivative thereof, and a gelled polysaccharide.

31. A process for preparing a composite membrane, comprising forming a reinforcing mesh wherein said mesh comprises at least one material selected from the group consisting of hyaluronic acid or a derivative thereof, and alginic acid or a derivative thereof, and applying to said reinforcing mesh a matrix comprising at least one material selected from the group consisting of hyaluronic acid or a derivative thereof, alginic acid or a derivative thereof, and a gelled polysaccharide.

32. Use of a composite membrane according to any one of claims 1-29 in surgery for the guided regeneration of tissues.

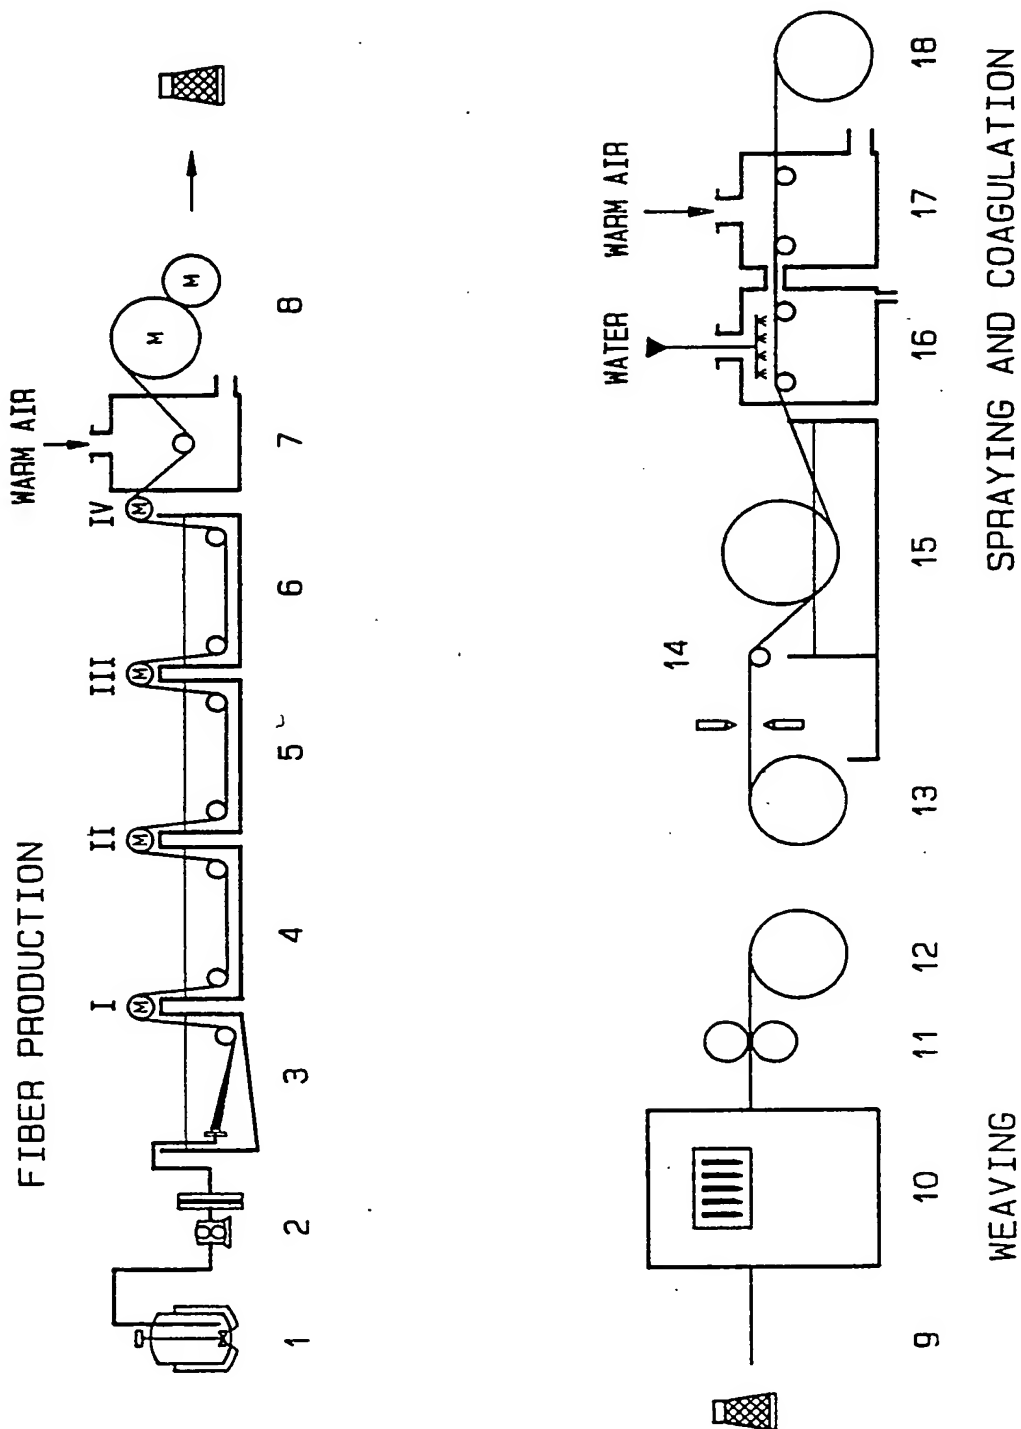


Fig. 1

THIS PAGE BLANK (CSPTO)

BEST AVAILABLE COPY

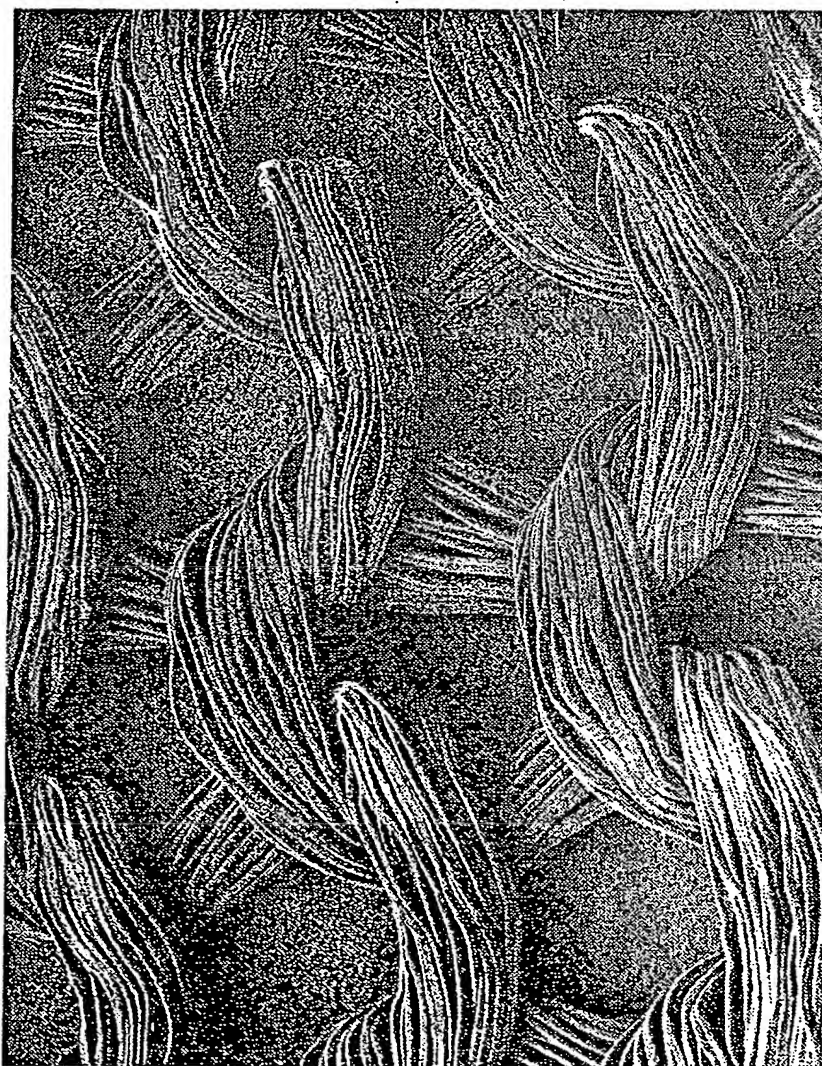


Fig. 2

THIS PAGE BLANK (USPTO)

BEST AVAILABLE COPY

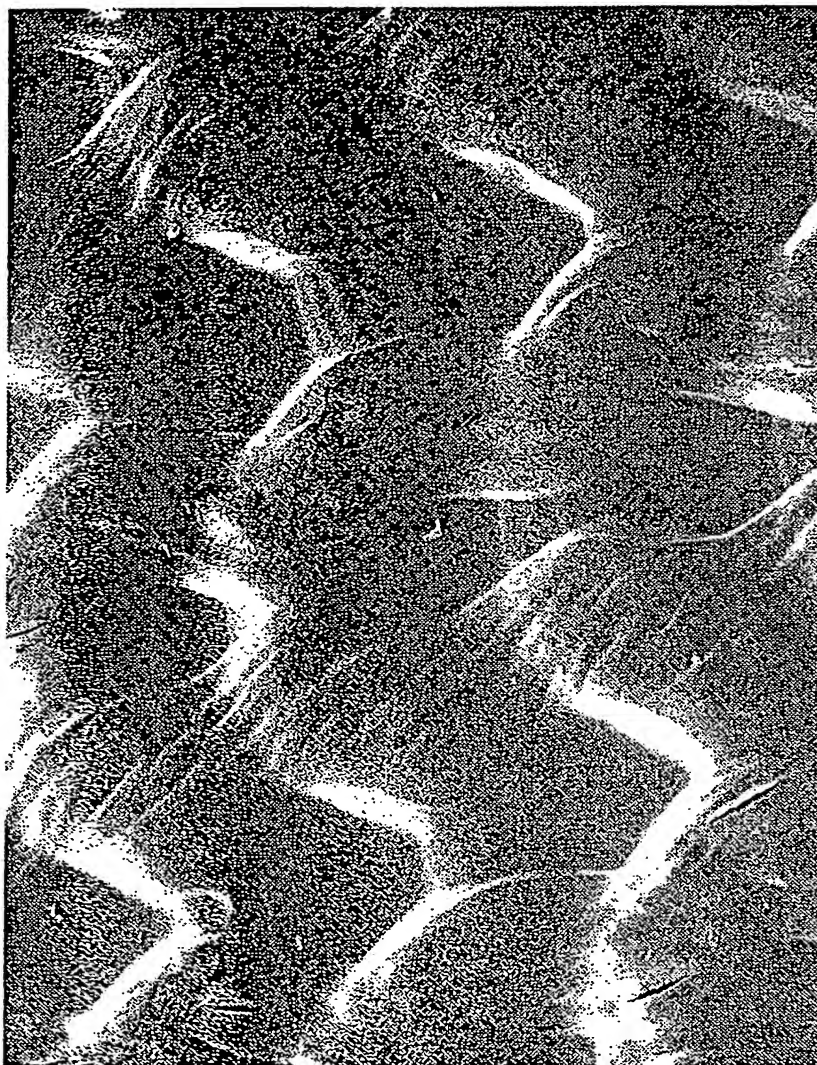


Fig. 3

THIS PAGE BLANK (USPTO)

I. CLASSIFICATION OF SUBJECT MATTER (If several classification symbols apply, indicate all) ⁶ According to International Patent Classification (IPC) or to both National Classification and IPC Int.Cl. 5 A61L31/00; D04H13/00		
II. FIELDS SEARCHED Minimum Documentation Searched ⁷		
Classification System	Classification Symbols	
Int.Cl. 5	A61L	
Documentation Searched other than Minimum Documentation to the Extent that such Documents are Included in the Fields Searched ⁸		
III. DOCUMENTS CONSIDERED TO BE RELEVANT⁹		
Category ¹⁰	Citation of Document, ¹¹ with indication, where appropriate, of the relevant passages ¹²	Relevant to Claim No. ¹³
X	EP,A,0 341 745 (FIDIA S.P.A.) 15 November 1989 see page 10, line 16 - line 40 see page 11, line 10 - line 44 see page 12, line 16 - line 22; claims ---	1-13, 27-32
X	EP,A,0 265 116 (FIDIA S.P.A.) 27 April 1988 see claims ---	1-13, 27-32
X	WO,A,9 117 744 (JERNBERG, GARY R.) 28 November 1991 see claims ---	1-2
X	WO,A,8 810 123 (CENTRE NATIONAL DE LA RECHERCHE SCIENTIFIQUE) 29 December 1988 see claims ---	1,4
-/--		
<div style="display: flex; justify-content: space-between;"> <div style="width: 45%;"> ¹⁰ Special categories of cited documents : "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed </div> <div style="width: 45%;"> "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. "A" document member of the same patent family </div> </div>		
IV. CERTIFICATION		
Date of the Actual Completion of the International Search		Date of Mailing of this International Search Report
21 APRIL 1993		12.05.93
International Searching Authority		Signature of Authorized Officer
EUROPEAN PATENT OFFICE		M. ESPINOSA

III. DOCUMENTS CONSIDERED TO BE RELEVANT (CONTINUED FROM THE SECOND SHEET)		
Category *	Citation of Document, with indication, where appropriate, of the relevant passages	Relevant to Claims No.
X	BIOMATERIALS vol. 12, no. 8, October 1991, pages 727 - 729 R.CORTIVO ET AL. ---	1-2
X	DATABASE WPIL Week 8709, Derwent Publications Ltd., London, GB; AN 87-062629 & ZA,A,8 605 071 (FIDIA S.P.A.) 8 July 1987 see abstract ---	1-2
X	PATENT ABSTRACTS OF JAPAN vol. 15, no. 031 (C-0798)1991 & JP,A,22 68 765 (KIBUN KK) see abstract ---	1
P,X	WO,A,9 213 579 (FIDIA S.P.A.) 20 August 1992 cited in the application see page 5 see page 6; claims; examples 26-35 ---	1-2
Y	EP,A,0 216 453 (FIDIA S.P.A.) 1 April 1987 cited in the application see claims & US,A,4 965 353 ---	1-32
Y	EP,A,0 251 905 (FIDIA S.P.A.) 7 January 1988 cited in the application see page 3, line 61 - line 65 see page 23, line 10 - line 45; claims; example 28 ---	1-32
A	US,A,4 280 954 (IOANNIS V. YANNAS ET AL.) 28 July 1981 see claims ---	1-32
A	GB,A,2 103 993 (DAVID PHILIP TONG) 2 March 1983 see claims -----	1

INTERNATIONAL SEARCH REPORT

International application No.

PCT/EP 92/02959

Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:
Although claim 30 is directed to a method of treatment of the human or animal body the search has been carried out and based on the alleged effects of the compounds.
2. ☐ Claims Nos.:
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☐ No protest accompanied the payment of additional search fees.

ANNEX TO THE INTERNATIONAL SEARCH REPORT ON INTERNATIONAL PATENT APPLICATION NO.

EP 9202959
SA 68942

This annex lists the patent family members relating to the patent documents cited in the above-mentioned international search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information. 21/04/93

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP-A-0341745	15-11-89	AU-B- 631125	19-11-92
		AU-A- 3574789	29-11-89
		WO-A- 8910941	16-11-89
		JP-T- 2504163	29-11-90
EP-A-0265116	27-04-88	AU-B- 610087	16-05-91
		AU-A- 7960087	21-04-88
		JP-A- 63105003	10-05-88
		US-A- 4957744	18-09-90
		ZA-A- 8707559	13-04-88
WO-A-9117744	28-11-91	AU-A- 7909691	10-12-91
		EP-A- 0528971	03-03-93
WO-A-8810123	29-12-88	FR-A- 2616318	16-12-88
		EP-A, B 0296078	21-12-88
		JP-T- 2500723	15-03-90
		US-A- 5166187	24-11-92
WO-A-9213579	20-08-92	None	
EP-A-0216453	01-04-87	AU-B- 591501	07-12-89
		AU-A- 5983686	26-02-87
		JP-A- 62064802	23-03-87
		US-A- 4965353	23-10-90
		US-A- 4851521	25-07-89
EP-A-0251905	07-01-88	AU-A- 7008491	16-05-91
		AU-B- 602901	01-11-90
		JP-A- 63033401	13-02-88
		US-A- 5147861	15-09-92
		ZA-A- 8704520	29-12-87
US-A-4280954	28-07-81	CA-A- 1087610	14-10-80
		DE-A, C 2631908	10-02-77
		FR-A, B 2318189	11-02-77
		GB-A- 1515963	28-06-78
		JP-C- 971413	27-09-79
		JP-A- 52030885	08-03-77
		JP-B- 54003779	27-02-79

**ANNEX TO THE INTERNATIONAL SEARCH REPORT
ON INTERNATIONAL PATENT APPLICATION NO.**

EP 9202959
SA 68942

This annex lists the patent family members relating to the patent documents cited in the above-mentioned international search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

21/04/93

Page 2

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
GB-A-2103993	02-03-83	AU-B- 546556	05-09-85
		AU-A- 8671082	24-02-83
		CA-A- 1192364	27-08-85
		EP-A, B 0072680	23-02-83
		JP-C- 1385882	26-06-87
		JP-A- 58054059	30-03-83
		JP-B- 61051042	07-11-86
		US-A- 4562110	31-12-85

THIS PAGE BLANK (USPTO)